


# SCAN COIN

## Shrink Wrapping Line

Automatic SC-99600

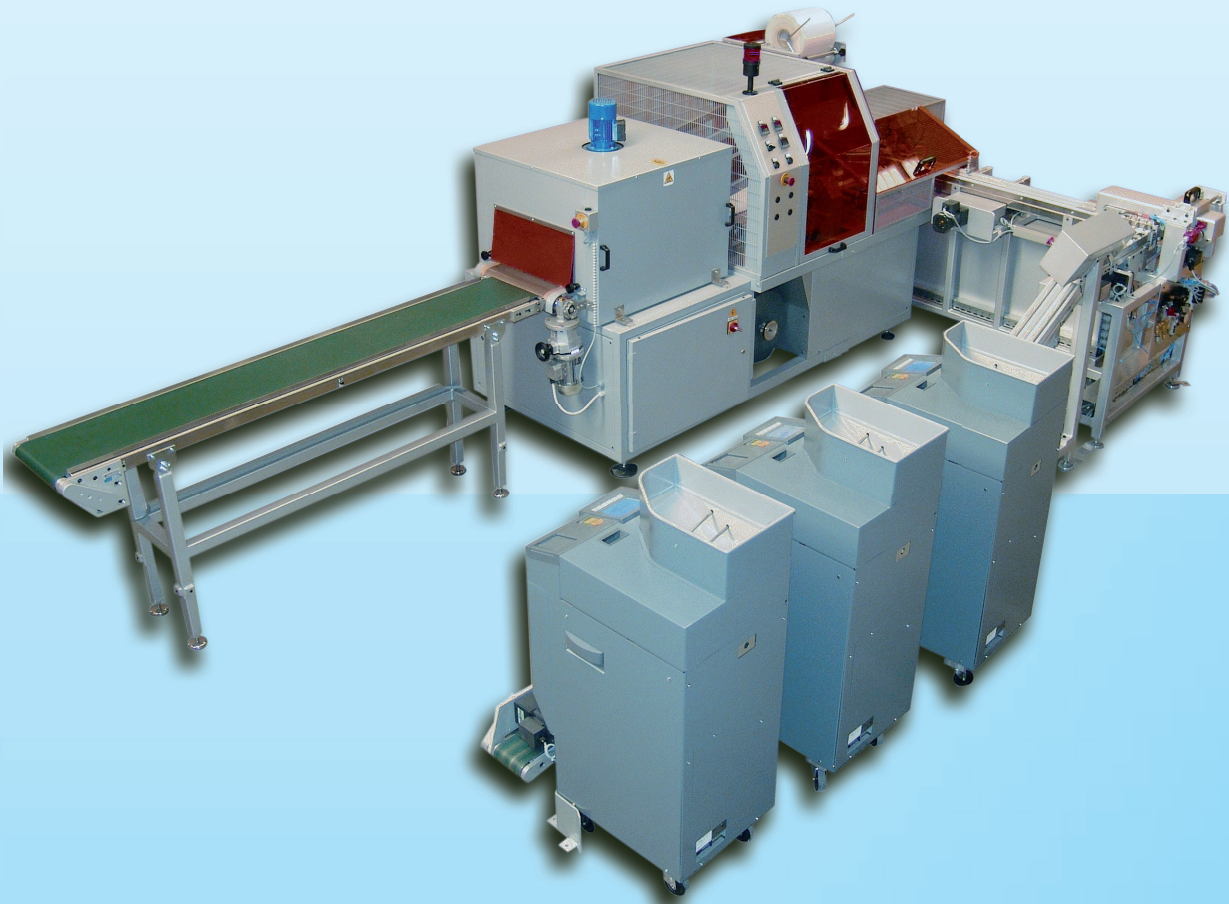

Enhanced efficiency and comfort with a robust and reliable design  
Easy integration with our other central cash equipment

[scancoin.com](http://scancoin.com)

# The Highest Industry Standard

# SCAN COIN

A packaging system meeting the highest industry standard for transport, all around sealing and shrink wrapping of coin rolls with up to 4 wrapping machines. The operator friendly control panel enables easy operation of the system and allows for changing between different denominations automatically. Just choose the next denomination on the operator's display - all settings are already programmed - and the settings will be executed automatically in the system.

## Features coin roll feeding

- Unique motorized, controllable conveyor receiving the coin rolls.
- Potential free, configurable connections for optimum synchronization of coin wrappers.
- Motorized, adjustable coin roll elevator for transporting the coin rolls to the shrink wrapping module.
- Electro pneumatic positioning of coin rolls.

## Features control panel

- User friendly interface with color touch screen for control and adjustment of the machine.
- Daily statistics.
- Emergency switch.
- Temperature controlled by thermo regulator.

## Features sealing

- All around sealing through L-form sealing bar, Teflon coated, easy access system.
- Fully automated pneumatic sealing concept when coin rolls enter.
- Motorized film feeding and micro perforating system with film roll holder.
- Shrink tunnel transport on Teflon coated wire mesh belt.
- Easy access system shrink tunnel with energy-saving heat recovery and optimized power distribution.
- Electronic heat regulation with automated cooling down at end of work.
- Coin package cooling, product jam monitoring.

## Technical Specification

## SC-99600

Output	up to 16 packages/min.
Film specification	film roll max. width 600mm, max dia 300 mm, Polyethylene, half tube film, 80 μ
Width film	250 mm (+3,-0), thickness film : 80μ (+5, -5)
Power Supply	400 V three phase + neutral + ground
Power consumption	7 kW
Pneumatic supply	6 bar, consumption 600 l/min
Overall size incl. coin wrapper	about 3,600 x 3,300 mm excluding discharge conveyor size to be defined with customer
Height	about 1,500 mm
Weight	about 1,600 kg